


RC125B LED34S/840 PSU W60L60

Kod produktu: 60604

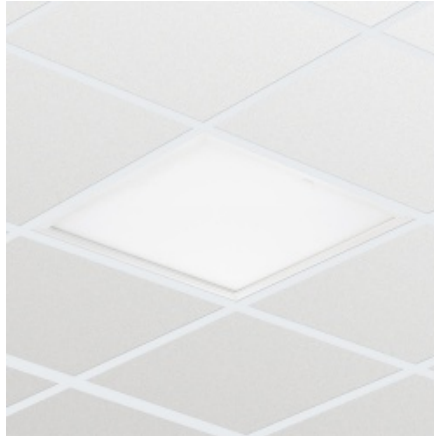

Dane techniczne:

- Dimmable **No [No]**
- Full product code **910503910025**
- Full product name **RC125B LED34S/840 PSU W60L60**
- Order code **910503910025**
- Order product name **RC125B LED34S/840 PSU W60L60**
- Pieces per pack **0**
- Bar code on outerbox - EAN3 **8718696067314**
- Packs per outerbox **1**
- Logistic code(s) - 12NC **910503910025**
- Net weight per piece **4.500 kg**
- Product family code **RC125B [RC125B]**
- Lamp family code **LED34S [LED Module, system flux 3400 lm]**
- Light source color **840 [840 neutral white]**
- Ingress protection code **IP20 [Finger-protected]**
- Input voltage **220-240 V [220 to 240 V]**
- Protection class IEC **CLII [Safety class II]**
- Mech. impact protection code **IK02 [0.2 J standard]**
- Color **WH [White]**
- CE mark **CE [CE mark]**
- ENEC mark **No**
- Flammability mark **F [For mounting on normally flammable surfaces]**
- Light source replaceable **false [No]**
- Connection **PIP [Push-in connector and pull relief]**
- Driver included **true [Yes]**
- Driver/power unit/transformer **PSU [Power supply unit]**
- Housing material **STL [Steel]**
- Input frequency **50-60 Hz [50 to 60 Hz]**
- Initial input power **41 W [41 W]**
- Initial LED luminaire efficacy **83 Lm/W**
- Initial luminous flux **3400 Lm**
- Init. Color Rendering Index **> 80 [> 80]**
- Init. Corr. Color Temperature **4000 [4000 K]**
- Initial chromaticity **(0.38, 0.38) SDCM**
- Driver failure rate at 5000 h **1.5 %**
- Median useful life L80B50 **30000 hr**

- Ambient temperature range **+10 to +40 °C** [+10 to +40 °C]
- Average ambient temperature **T25** [+25 °C]
- Suitable for random switching **Yes** [Yes (relates to presence/ movement detection and daylight harvesting)]
- Optic material **PMMA** [Polymethyl methacrylate]
- Median useful life L90B50 **15000 hr**
- Safety device **SC** [Safety cable]
- Geometry **W60L60** [Width 0.60 m, length 0.60 m]
- UL mark **No**
- Luminous flux tolerance **5%**
- Luminaire light beam spread **110** [110 degrees]
- Median useful life L70B50 **50000 hr**

RC125B - LED Module, system flux 3400 lm - Power supply unit

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Panel range of LED products can be used to replace functional luminaires in general lighting applications. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Features


Integrated LED technology

Slim square housing

Choice of two color temperatures: 3000 and 4000 K

Applications


General lighting

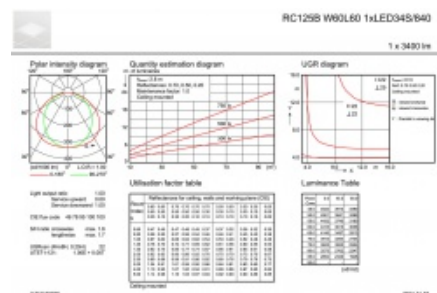



RC125B W60L60 1xLED345/640

1 x 3450 lm



LVC1140460

2014-11-18

