


# Fuzo LED 28W 3000K 918 mm x 91 mm Line

Kod produktu: 62555

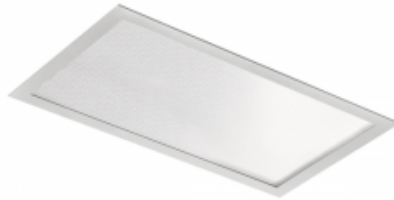

## Dane techniczne:

- Light source power **1x28W**
- Louver/shutter **MPRM**
- Info **LIGHTING LINE**
- Luminaire luminous efficacy **75 lm/W**
- Luminaire luminous flux **2100 lm**
- Color temperature **3000K**
- Weight **2.60 kg**
- Energy class **A+**
- Type of installation **Recessed**
- Housing material **Steel sheet**
- Diffuser color **None**
- Light source **LED**
- Number of light sources **1**
- Type of equipment **AC**
- Voltage rating **230 V**
- Light source included **Yes**
- Type of LED **LG6030**
- SELV **Yes**
- Color **Grey**
- Light color **White**
- Color rendering index **80**
- Class of luminaire **I**
- Light distribution **DI**
- Degree of protection (IP) **IP44**
- Class of protection **I**
- CE **Yes**
- Light source protection **Yes**
- For ceiling installation, fire class "F" (L) **Yes**

LED luminaire for universal use. Made with use of energy-saving LEDs of high luminous efficiency from reputable manufacturers. FUZO have been provided with power supply with power factor  $\cos \phi > 0,95$ . Available with housing of different colors, suitable for any interior color. Application: offices, conference rooms, corridors

**Materials:** frame made of electrostatically painted sheet aluminium (standard – grey). Frame can

be painted in any RAL color. White housing made of sheet steel. MPRM prismatic diffusor.

**Installation:** suspended ceiling with visible supporting structure or plaster cardboard ceiling

**Power:** 230 V

	<b>L</b>	<b>W</b>	<b>H</b>	<b>C</b>	<b>D</b>
PX2065315 11W	240	240	82	230	230
PX2065415 11W	240	240	82	230	230
PX2065322 22W	240	240	82	230	230
PX2065422 22W	240	240	82	230	230
PX2065330 21W	420	240	82	410	230
PX2065430 21W	420	240	82	410	230
PX2065340 31W	420	420	82	410	410
PX2065440 31W	420	420	82	410	410
PX2065444 44W	595	595	52	585	585
PX2065448 44W	595	595	52	585	585
PX2065451 20W	618	91	82	600	73
PX2065458 20W	618	91	82	600	73
PX2065465 28W	918	91	82	900	73
PX2065472 28W	918	91	82	900	73
PX2065479 38W	1218	91	82	1200	73
PX2065486 38W	1218	91	82	1200	73
PX2065101 11W	240	240	82	230	230
PX2065108 11W	240	240	82	230	230
PX2065115 22W	240	240	82	230	230
PX2065122 22W	240	240	82	230	230
PX2065129 21W	420	240	82	410	230
PX2065136 21W	420	240	82	410	230
PX2065143 31W	420	420	82	410	410
PX2065150 31W	420	420	82	410	410
PX2065157 44W	595	595	52	585	585
PX2065164 44W	595	595	52	585	585
PX2065171 20W	618	91	82	600	73
PX2065178 20W	618	91	82	600	73
PX2065185 28W	918	91	82	900	73
PX2065192 28W	918	91	82	900	73
PX2065199 38W	1218	91	82	1200	73
PX2065206 38W	1218	91	82	1200	73

L - Length

W - Width

H - Height / Depth

C - Installation length

D - Installation width

