


# Sun LED 44W 4000K Suspended 1196x296

Kod produktu: 62644

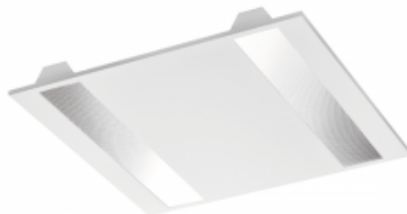

## Dane techniczne:

- Light source power **1x44W**
- Info **Suspended 1196x296**
- Luminarie luminous efficacy **96 lm/W**
- Luminarie luminous flux **4235 lm**
- Color temperature **4000K**
- Weight **4.40 kg**
- Type of installation **Suspended**
- Housing material **Steel sheet**
- Reflector **High gloss**
- Diffuser color **None**
- Louver/shutter **MPRM**
- Diffuser material **Prismatic plastic**
- Light source **LED**
- Type of equipment **AC**
- Voltage rating **230 V**
- Light source included **Yes**
- Type of LED **LG6030**
- Power factor **0.97**
- SELV **Yes**
- Color **White**
- Operating temperature range **0 ... 40 °**
- Dimmable **Yes**
- Light color **White**
- Color rendering index **80**
- Light distribution **DI**
- Degree of protection (IP) **IP44**
- Class of protection **I**
- Energy class **A+**
- CE **Yes**
- Light source protection **Yes**
- For ceiling installation, fire class "F" (L) **Yes**

Modern luminaire designed for LED light sources of high lighting efficiency. SUN LED has an aesthetic appeal, it's light and quick in installation. It also connect high lighting performance with low level of Unified Glare Rating (UGR). SUN LED has been equipped with a power supply with power factor  $\cos \phi > 0,95$ . DALI ballast – on request. Product is

designed for offices, conference rooms and passageways.

**Materials:** Housing made of steel, electrostatically painted in white (standard color) with all other RAL colors available. Microprismatic diffuser (MPRM).

**Installation:** In the modular ceiling with visible grid, or into plaster-cardboard ceiling, suspended, surface mounted

**Accessories:** Plaster-cardboard frame to 600x600 version

**Power:** 230 V

	<b>L</b>	<b>W</b>	<b>H</b>
PX2065557 18W	596	596	47
PX2065564 18W	596	596	47
PX2065571 36W	1196	296	47
PX2065578 36W	1196	296	47
PX2065585 18W	596	596	47
PX2065592 18W	596	596	47
PX2065599 36W	1196	296	47
PX2065606 36W	1196	296	47
PX2065501 22W	596	596	47
PX2065508 22W	596	596	47
PX2065515 44W	1196	296	47
PX2065522 44W	1196	296	47
PX2065529 22W	596	596	47
PX2065536 22W	596	596	47
PX2065543 44W	1196	296	47
PX2065550 44W	1196	296	47

L - Length

W - Width

H - Height / Depth



